
MALCON MARINE AND LAND CONSTRUCTION

Duct

INSRIP

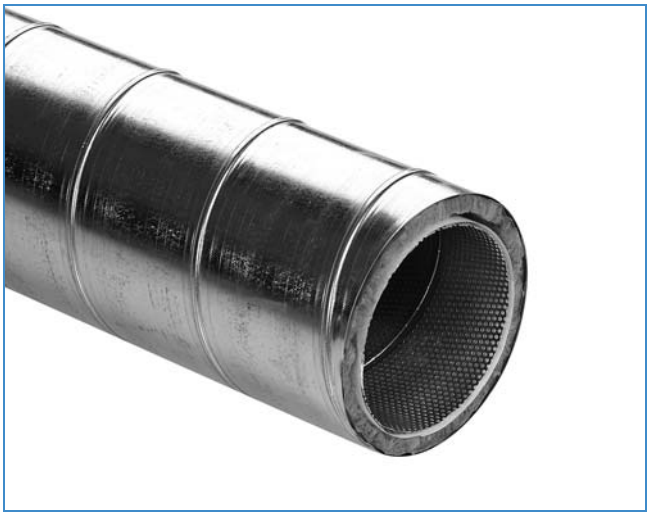

Description

The duct is double-jacketed and insulated with mineral wool and has an attenuating effect.
Internal duct is perforated.


Perforation: 3 mm holes.
Triangulation: 5 mm.
Open: 32,6%.

Order code

INSRIP 125 3000

Product
Dimension Ød
Lenght l

Dimensions

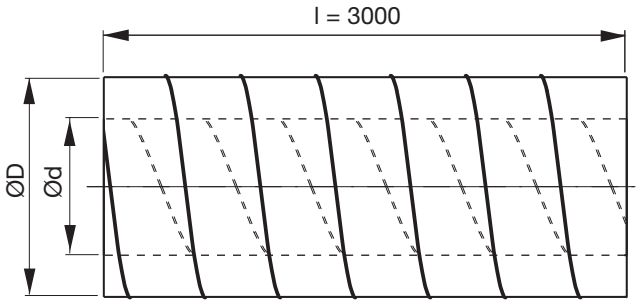

Ød nom	ØD mm	m_l* kg
80	112	9,3
100	132	11,7
125	157	14,2
160	192	17,3
180	200	18,6
200	232	21,4
224	260	23,9
250	280	26,0
280	315	28,3
300	355	30,0
315	355	34,7

* = weight can vary ±10%.

Ød / ØD	Length	Attenuation in dB for centre frequency Hz							
mm	mm	63	125	250	500	1k	2k	4k	8k
80 / 112	500	2	4	7	7	11	23	28	11
	1000	3	5	8	13	28	45	37	16
	1500	4	5	8	17	38	>50	42	20
	3000	5	7	11	20	>50	>50	45	24
100 / 132	500	2	3	5	5	10	21	25	7
	1000	2	4	8	9	18	36	36	13
	1500	3	5	8	13	30	49	44	17
	3000	4	7	10	17	>50	>50	45	21
125 / 157	500	2	2	3	6	10	23	20	6
	1000	2	4	6	9	18	35	29	10
	1500	3	4	7	11	24	43	35	13
	3000	4	7	8	14	>50	>50	38	15
160 / 192	500	2	2	3	3	8	19	15	6
	1000	2	2	4	7	17	38	25	10
	1500	2	3	5	9	22	45	31	15
	3000	4	7	8	15	>50	>50	>50	23
180 / 200	500	-	1	1	2	5	13	12	6
	1000	-	1	1	2	7	19	21	8
	1500	1	2	3	3	8	24	27	11
	3000	2	3	4	7	15	31	29	13
200 / 232	500	2	2	2	3	7	20	10	5
	1000	2	2	3	5	14	32	14	7
	1500	3	3	4	7	18	41	20	12
	3000	4	5	7	15	41	>50	28	16

NB.
Max. attenuation specified is 50 dB.

We reserve the right to make changes without prior notice
rev. 2018-04-04

Lindab®
www.lindabmarine.com