MALCON MARINE AND LAND CONSTRUCTION

Reducer

RCFU




Description

Pressed, concentric reducer with female coupling to meet demands for short installation length with low pressure drop and low internal noise generation. Ød fits outside another fitting.

Has Click function at the Safe end – has an open turned-over end.
Has normally not any Click function at the female end – hasn't any notches.
Ø 80–315 can upon order be delivered with click function at the female end as well – i.e. with notches.

Also available in other dimensions up to Ø400.

Dimensions

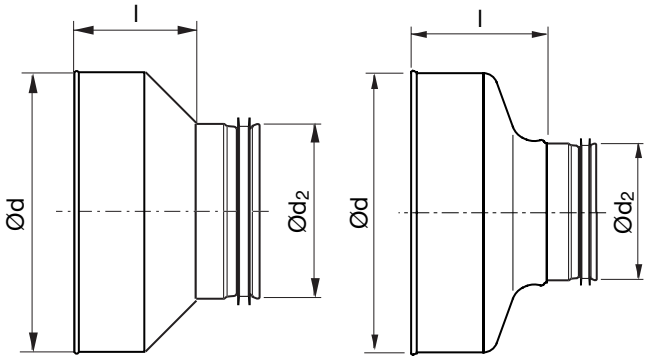

Type 1 Type 2

Ød nom	Ød2 nom	l mm	Type	m kg
100 *	80	61	2	0,16
125 *	80	73	2	0,16
125 *	100	64	2	0,14
160 *	80	92	1	0,24
160 *	100	83	2	0,16
160 *	125	71	2	0,20
180	100	98	1	0,24
180	125	85	1	0,31
180	160	66	1	0,27
200 *	100	84	2	0,23
200 *	125	90	2	0,27
200 *	160	73	2	0,26
200 *	180	63	1	0,32
224	160	87	1	0,49
224	180	76	1	0,46
224	200	66	1	0,45
250 *	125	133	1	0,57
250 *	160	117	2	0,40
250 *	180	107	1	0,55
250 *	200	103	2	0,42
250 *	224	89	1	0,53
315 *	160	153	1	0,82
315 *	180	137		0,80
315 *	200	134	2	0,77
315 *	250	108	2	0,65

* With turned-over edge

Order code

RCFU	200	180
Product		
Dimension Ød		
Dimension Ød2		

We reserve the right to make changes without prior notice
rev. 2019-04-02

Lindab® www.lindabmarine.com