MALCON MARINE AND LAND CONSTRUCTION

Circular straight silencer SLU50



Description

SLU 50 is a circular straight silencer with a connection diameter available between 63 - 400 mm.

Nominal insulation thickness 50 mm. Attenuation material is mineral wool. The SLU's are made of strong outer spiral seemed tube and an inner tube made of sheet steel with small openings to be able to withstand mechanical cleaning and at the same time not interfere with the insertion loss. The space between them is filled with mineral wool and a nonwoven cloth is inserted between inner tube and the attenuation material, to prevent fibers from the insulation getting into the duct system.

Tested according to ISO 7235 standard.

Special materials and sizes, please contact Lindab sales.

To select the appropriate silencer and optimize connection size and length for the best performance you can use our online tool lindQST or our free to download software DIMsilencer.

Order

Product SLU — **a** — **l** — **C**

SLU

Connection dim. $Ød_{1nom}$ (a)

63 - 400 mm

Length (l) in mm (l_{nom})

300 - 1200


Insulation thickness (C)

50 mm

Example: SLU - 80 - 600 - 50

EUROVENT CERTIFIED PERFORMANCE www.eurovent-certification.com

Dimensions and sound data

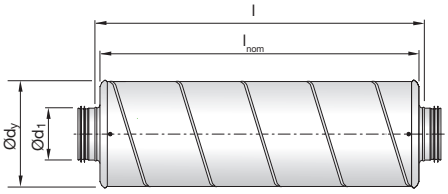


$Ød_{1nom}$ [mm]	l_{nom} [mm]	Insertion loss [dB] for centre frequency [Hz]										
		63	125	250	500	1k	2k	4k	8k	Ødy	l	m
63	300	0	6	13	21	32	44	36	26	170	300	1,8
63	600	0	7	20	35	50	50	50	34	170	600	3,0
80	300	1	5	8	15	25	25	21	15	190	300	2,0
80	600	2	8	14	28	49	50	47	24	190	600	3,0
80	900	3	10	21	40	50	50	50	34	190	900	5,0
80	1200	4	13	27	50	50	50	50	43	190	1200	7,0
100	300	1	5	7	15	25	25	21	13	210	360	2,0
100	600	1	7	12	25	43	48	35	20	210	660	3,0
100	900	2	10	17	34	50	50	49	28	210	960	5,0
100	1200	3	12	22	44	50	50	50	35	210	1260	7,0
125	300	0	4	5	13	23	20	16	11	235	365	3,0
125	600	1	5	10	22	39	37	26	16	235	665	4,0
125	900	1	7	14	30	50	50	37	21	235	965	7,0
125	1200	2	9	18	39	50	50	47	26	235	1265	9,0
160	300	0	3	5	11	22	16	11	7	270	370	3,0
160	600	1	4	8	19	37	28	17	11	270	670	6,0
160	900	1	5	12	27	50	39	24	14	270	970	8,0
160	1200	2	6	15	35	50	50	30	17	270	1270	10,0
200	300	0	2	4	9	19	11	7	5	310	385	4,0
200	600	1	3	8	15	28	19	12	8	310	685	7,0
200	900	2	4	11	21	37	28	16	10	310	985	10,0
200	1200	2	5	14	27	46	36	21	13	310	1285	12,0
250	300	0	1	3	7	15	8	5	5	365	300	6,0
250	600	1	2	6	14	26	14	8	7	365	600	9,0
250	900	1	3	9	19	38	19	11	9	365	900	12,0
250	1200	2	4	11	24	50	24	13	11	365	1200	15,0
315	300	0	1	2	6	12	5	4	4	427	300	8,0
315	600	0	2	4	10	22	9	6	7	427	600	12,0
315	900	2	3	7	16	31	13	8	9	427	900	18,0
315	1200	2	3	8	20	39	16	9	10	427	1200	24,0
400	300	0	1	2	3	3	2	3	1	508	300	12,0
400	600	0	2	4	8	10	5	4	4	508	600	16,0
400	900	0	2	5	12	16	7	5	6	508	900	22,0
400	1200	0	2	7	16	20	9	6	7	508	1200	32,0

There is given max. attenuation values of 50 dB in the table above.

* Supplied with two loose couplings (Type NPU).

Circular straight silencer SLU50

Technical data

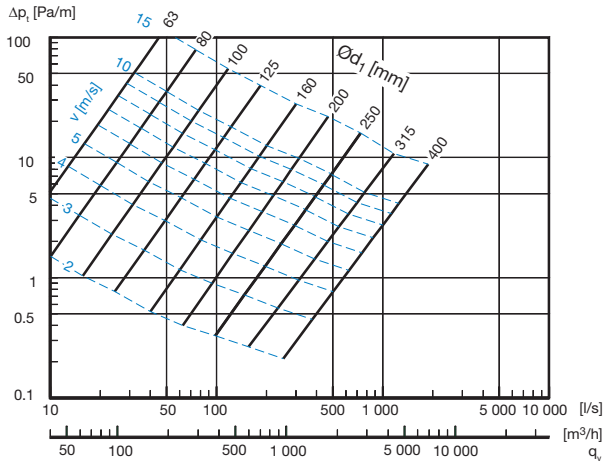

We reserve the right to make changes
2020-01-27