Suspension ring

UV25




Description

For suspension of circular ducting. At insulated duct it is recommended that the suspension ring is mounted inside the insulation.

Also available in other dimensions up to Ø400.

Dimensions

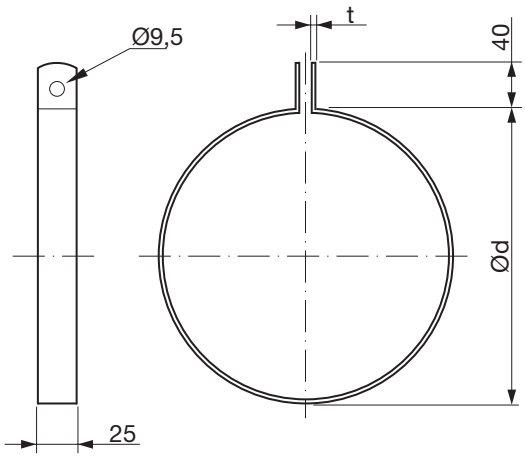

Ød nom	t mm	m kg
80	2,0	0,13
100	2,0	0,15
125	2,0	0,18
160	2,0	0,22
200	2,0	0,27
250	2,0	0,33

Order code

	UV25	200
Product		
Dimension Ød		

We reserve the right to make changes without prior notice
rev. 2018-04-04